

Venturi Injectors

ZX - Range




Body Material :Virgin PVC (also available in S/steel threaded)

Design

Proprietary multiple injection design ensures the optimal transfer of ozone into the water.


<u>Model</u>	<u>Inlet /outlet size</u> <i>PVC pressure fitment sizes (glue slip fit)</i>	<u>Fluid flow rates</u>	<u>Length</u>
ZX-32mm	32 mm	Min 11m ³ /hr (185 L/pm) Max 22 m ³ /hr (365 L/pm) with a minimum entry pressure 0, 75 bar and max of 1.5 bar	120mm
ZX-40mm	40 mm	Min 11m ³ /hr (185 L/pm) Max 22 m ³ /hr (365 L/pm) with a minimum entry pressure 0, 75 bar and max of 1.5 bar	120mm
ZX-50mm	50 mm	Min 30.m ³ /hr (500 L/pm) Max 61 m ³ /hr (1020 L/pm)	145mm

Also available in a bypass manifold configuration.

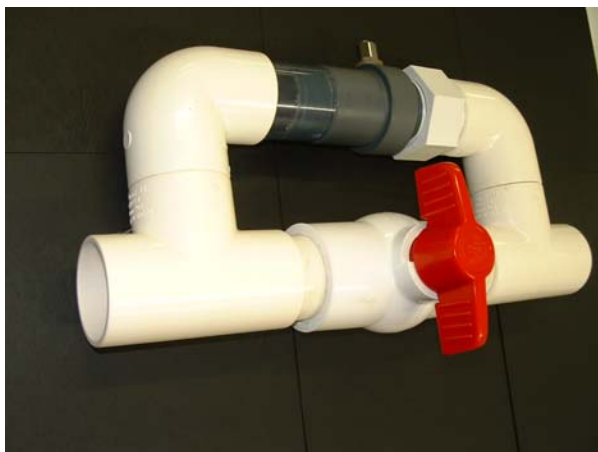

684 Mazzie

Swage fittings 20mm (Material PVDF)

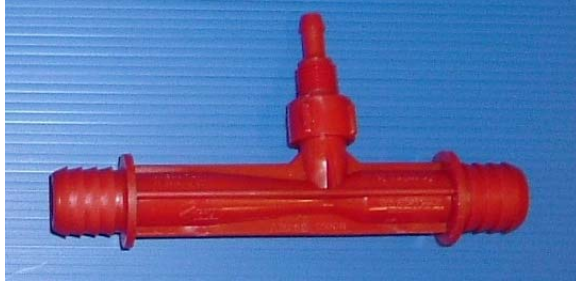

Threaded 1 inch BSP (Material PVDF)

